
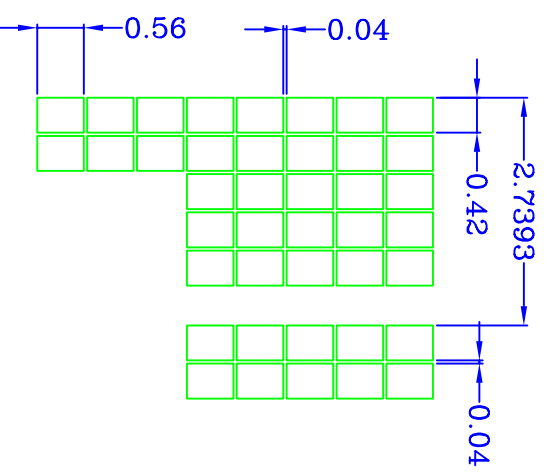
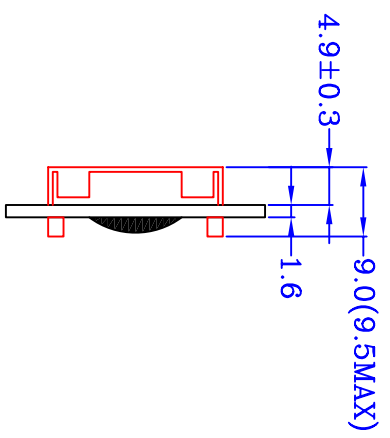


1	VSS	Power ground
2	VDD	Power supply (+3.3V)
3	V0	Contrast adjust
4	RS	Register select
5	R/W	H: Read, L: Write
6	E	Enable signal
7	DB0	DATA BUS 0
8	DB1	DATA BUS 1
9	DB2	DATA BUS 2
10	DB3	DATA BUS 3
11	DB4	DATA BUS 4
12	DB5	DATA BUS 5
13	DB6	DATA BUS 6
14	DB7	DATA BUS 7
15	NC	NO CONNECTION
15	NC	NO CONNECTION

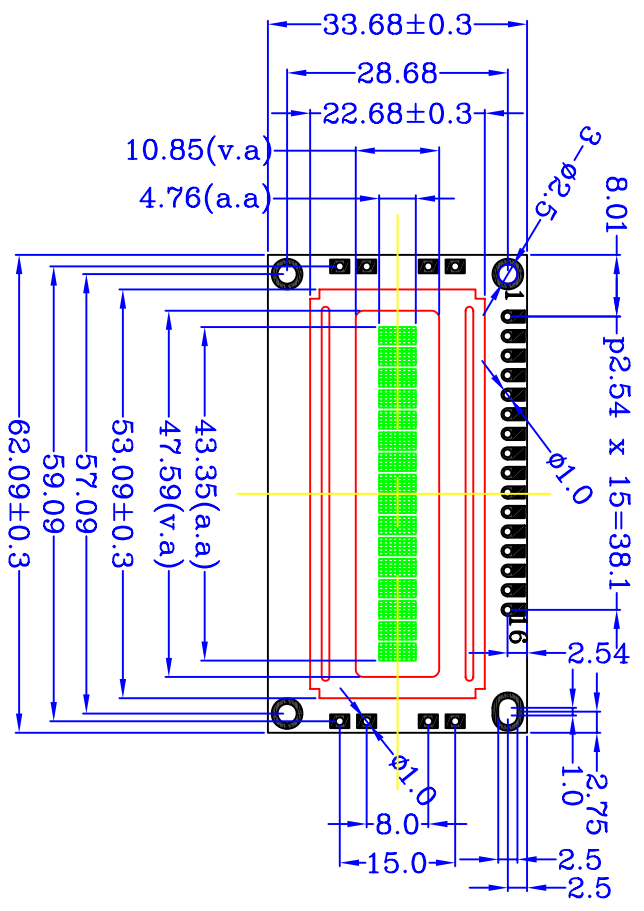

NOTES:

1. DISPLAY TYPE: HTN
2. POLARIZER TYPE: REFLECTIVE, POSITIVE
3. VIEW DIRECTION: 6:00
4. OPERATING TEMPERATURE: 0°C~+50°C
5. STORAGE TEMPERATURE: -10°C~+60°C
6. VDD: +3.3V
7. DRIVE METHOD: 1/16DUTY, 1/4BIAS
8. CONTROLLER: S6A0069 OR EQUIVALENT
9. ROHS COMPLIANCE

WAYING (HONGKONG) SHARES LIMITED			
DESIGN:	MODEL NUMBER:	UNITS:	MM
CHECK:	WYM1601K	VERSION:	A
APPROVE:		SHEET:	1 OF 1
Unspecified tolerances are ±0.3		DATE:	2007-04-10