
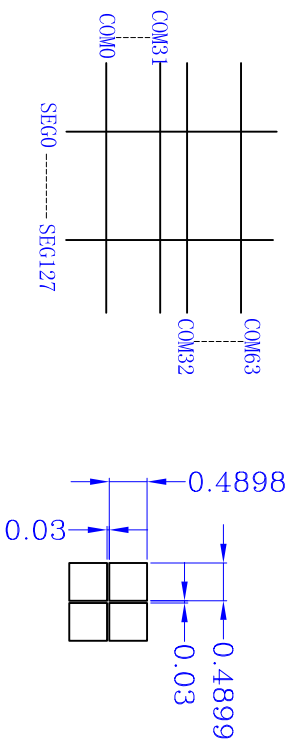
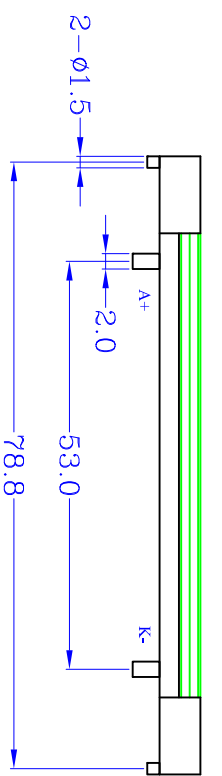


31	/CS
30	/RST
29	A0
28	/WR(R/W)
27	/RD(E)
26	DB0
25	DB1
24	DB2
23	DB3
22	DB4
21	DB5
20	DB6(SCT)
19	DB7(SCT)
18	VDD
17	VSS
16	VOUT
15	C3P
14	C1N
13	C1P
12	C2P
11	C2N
10	V4
9	V3
8	V2
7	V1
6	V0
5	VDD
4	C86
3	P/S
2	IRS
1	VSS

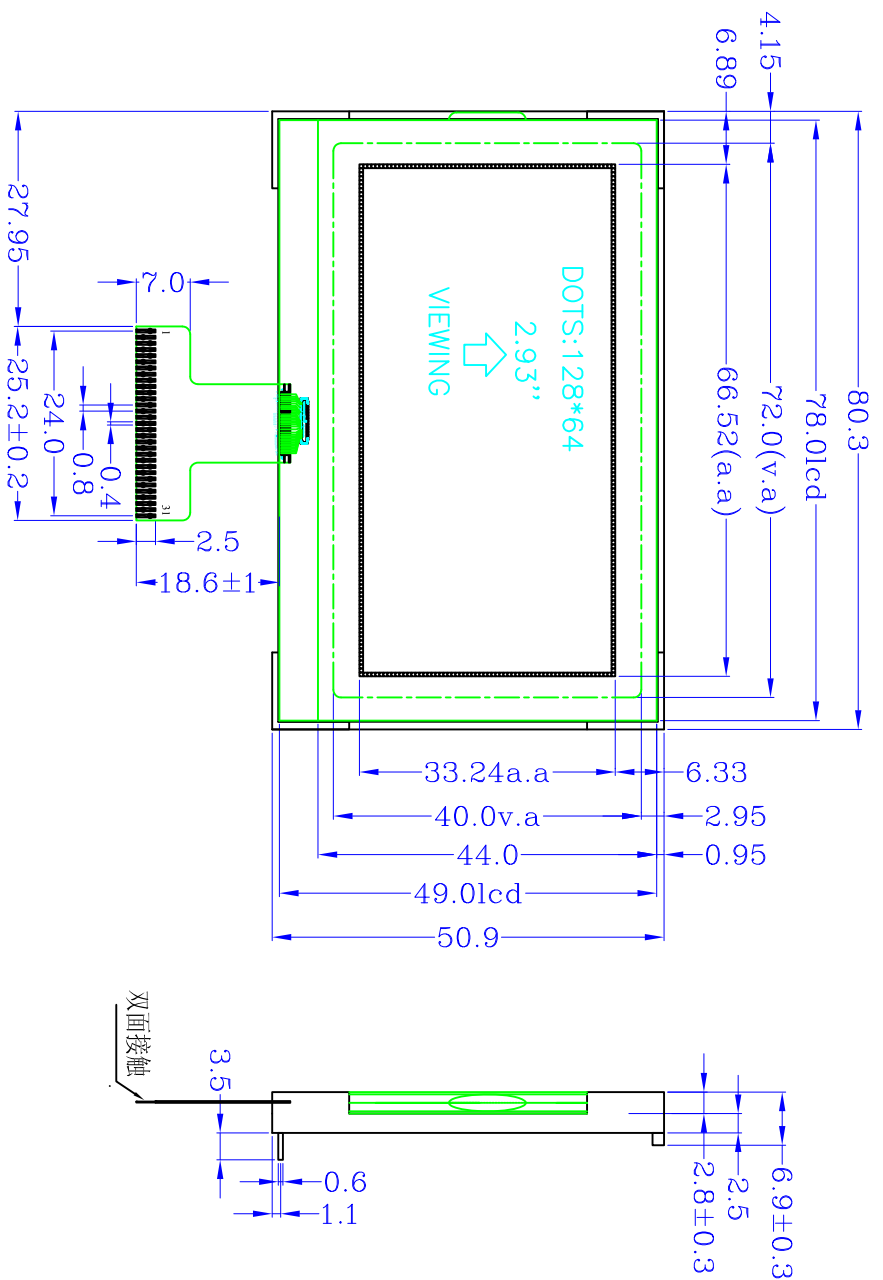

- NOTES:
1. DISPLAY TYPE: STN, YELLOW-GREEN
 2. POLARIZER TYPE: TRANSPARENT, POSITIVE
 3. VIEW DIRECTION: 6:00
 4. OPERATING TEMPERATURE: -20°C~+70°C
 5. STORAGE TEMPERATURE: -30°C~+80°C
 6. VDD: +3.3V
 7. DRIVE METHOD: 1/64DUTY, 1/9BIAS
 8. CONTROLLER: ST7565R
 9. BACKLIGHT TYPE: YELLOW-GREEN
 10. BACKLIGHT SUPPLY VOLTAGE: 3.0V

		WAYING (HONGKONG) SHARES LIMITED	
		DESIGN:	MODEL NUMBER:
WYM12864K45G	UNITS:	MM	
CHECK:	VERSION:	A	
APPROVE:	SHEET:	1 OF 1	
Unspecified tolerances are ±0.3		DATE:	2013-04-17