


1	FG	Frame ground
2	VSS	Power ground
3	VDD	Power supply (+3.3V)
4	NC	No connection
5	/WR	Data write
6	/RD	Data read
7	/CS	Chip select
8	CD	L: Command; H:Data
9	/RST	Reset signal
10	DB0	DATA BUS 0
11	DB1	DATA BUS 1
12	DB2	DATA BUS 2
13	DB3	DATA BUS 3
14	DB4	DATA BUS 4
15	DB5	DATA BUS 5
16	DB6	DATA BUS 6
17	DB7	DATA BUS 7
18	NC	No connection
19	NC	No connection
20	A	Backlight (+) +3.3V
21	K	Backlight (-)

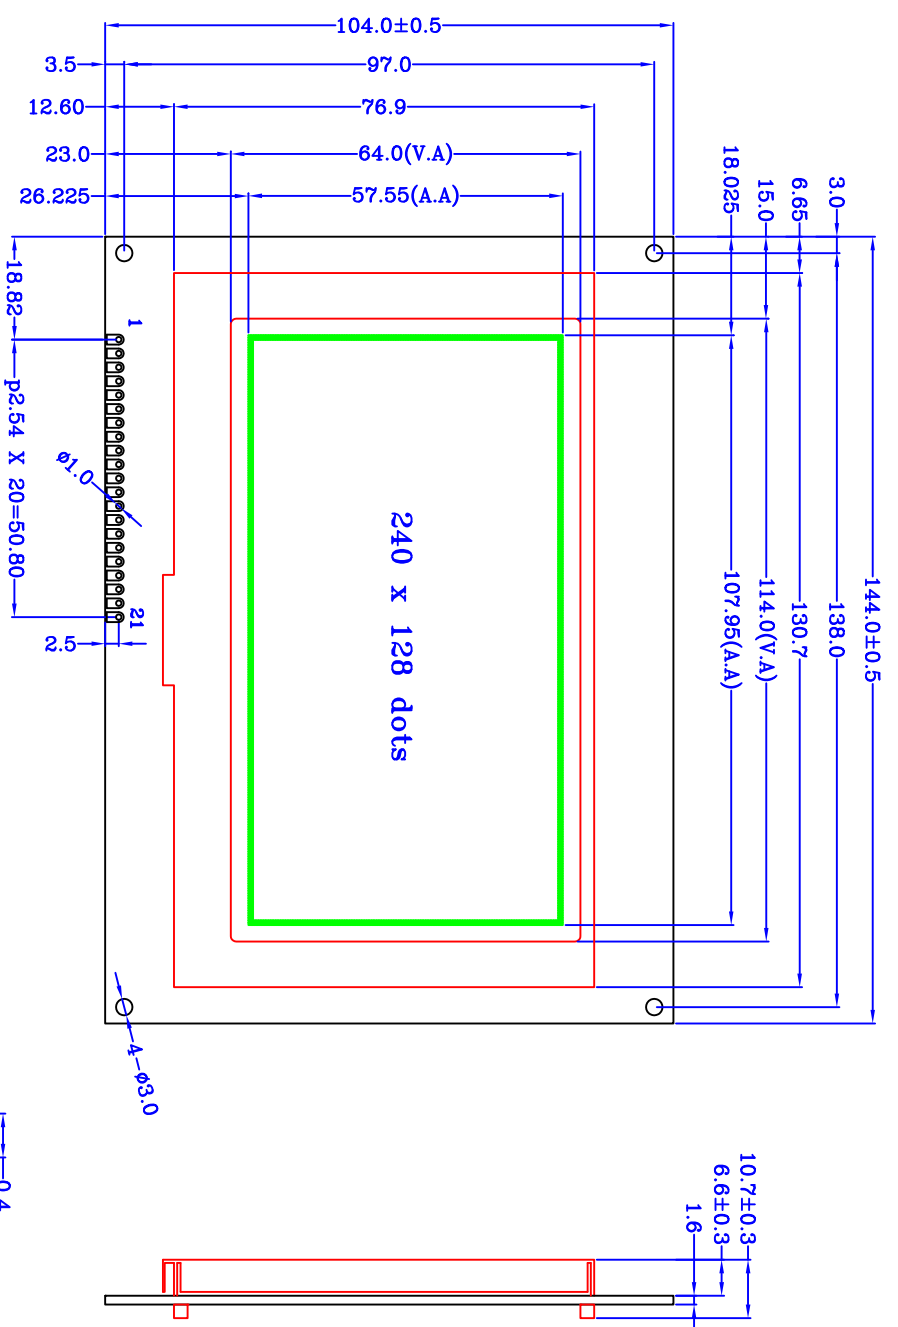

- NOTES:
1. DISPLAY TYPE: FSTN
 2. POLARIZER TYPE: TRANSPARENT, POSITIVE
 3. VIEW DIRECTION: 6:00
 4. OPERATING TEMPERATURE: -20°C~+70°C
 5. STORAGE TEMPERATURE: -30°C~+80°C
 6. VDD: +3.3V
 7. DRIVE METHOD: 1/128DUTY, 1/12BIAS
 8. CONTROLLER: UC1698
 9. BACKLIGHT TYPE: WHITE
 10. BACKLIGHT SUPPLY VOLTAGE: +3.3V

		DESIGN:	MODEL NUMBER:	UNITS:	MM
		CHECK:	WYM240128K3	VERSION:	A
APPROVE:			SHEET:	1 OF 1	
Unspecified tolerances are ±0.3			DATE:	2012-09-16	