
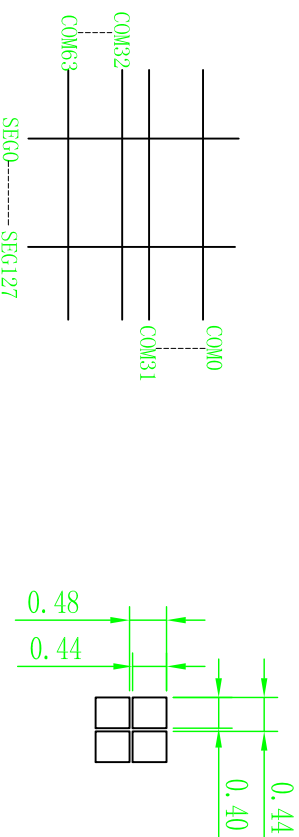


1	VSS	Power ground
2	VDD	Power supply (+3.3V)
3	V0	Contrast adjust
4	DB7	DATA BUS 7
5	DB6	DATA BUS 6
6	DB5	DATA BUS 5
7	DB4	DATA BUS 4
8	DB3	DATA BUS 3
9	DB2	DATA BUS 2
10	DB1	DATA BUS 1
11	DB0	DATA BUS 0
12	/rd	Read signal
13	/wr	Write signal
14	RS	H:data; L: instruction
15	/CS1	Chip select
16	/RES	Reset signal
17	A	Backlight (+) +3.3V
18	K	Backlight (-)



**NOTES:**

1. DISPLAY TYPE: STN, YELLOW-GREEN
2. POLARIZER TYPE: TRANSPARENT, POSITIVE
3. VIEW DIRECTION: 6:00
4. OPERATING TEMPERATURE: -20°C~+70°C
5. STORAGE TEMPERATURE: -30°C~+80°C
6. VDD: +3.3V
7. DRIVE METHOD: 1/64DUTY, 1/9BIAS
8. CONTROLLER: RA8816
9. BACKLIGHT TYPE: WHITE
10. BACKLIGHT SUPPLY VOLTAGE: +3.3V

**WYING WAYING (HONGKONG) SHARES LIMITED**

DESIGN: MODEL NUMBER: UNITS: MM

CHECK: WYM12864K20 VERSION: A

APPROVE: SHEET: 1 OF 1

Unspecified tolerances are ±0.3

DATE: 2014-02-15